

CHAPTER 6

2D and 3D Wavefronts

CONTENTS

1	Introduction	1
2	Wavefronts	1
3	Huygens principle	2
4	Diffraction	4
5	Diffraction through a single slit	6
5.1	Diffraction patterns	7
5.2	Effect of slit width and wavelength on diffraction patterns	10
5.3	Wave nature of light	11
5.4	Extension: Calculating maxima and minima [NOT IN CAPS]	13
6	Chapter summary	17
7	Exercises	18
7.1	Exercise 1	18
8	Answers to exercises	19
8.1	Exercise 1	19

LIST OF TABLES

LIST OF FIGURES

1	Wavefronts are imaginary lines joining waves that are in phase. In the example, the wavefronts (shown by the orange, vertical lines) join all waves at the crest of their cycle.	2
2	A single wavefront at time t acts as a series of point sources of circular waves that interfere to give a new wavefront at a time $t + \Delta t$. The process continues and applies to any shape of waveform.	3
3	A diffraction grating reflecting green light.	11

April 20, 2021

1 INTRODUCTION


You have learnt about the basic properties of waves before, specifically about reflection and refraction. In this chapter, you will learn about phenomena that arise with waves in two and three dimensions: diffraction. We will also build on interference which you have learnt about previously but now in more than one dimension.

2 WAVEFRONTS

INVESTIGATION

Wavefronts

The diagram below shows three identical waves being emitted by three point sources. A point source is something that generates waves and is so small that we consider it to be a point. It is not large enough to affect the waves. All points marked with the same letter are in phase. Join all points with the same letter.

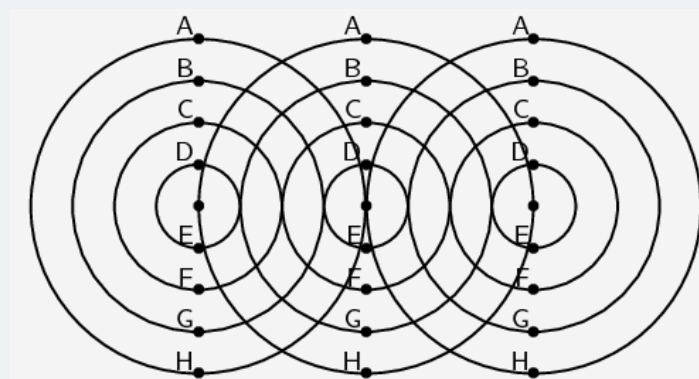

What type of lines (straight, curved, etc.) do you get? How does this compare to the line that joins the sources?

Consider three point sources of waves. If each source emits waves isotropically (i.e. the same in all directions) we will get the situation shown in as shown in Figure 1 below.

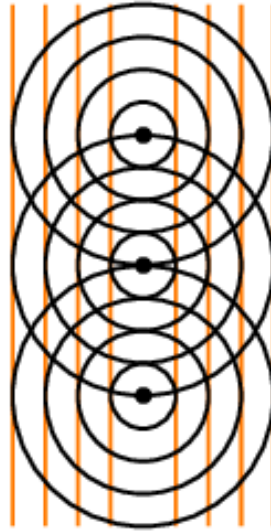


Figure 1: Wavefronts are imaginary lines joining waves that are in phase. In the example, the wavefronts (shown by the orange, vertical lines) join all waves at the crest of their cycle.

DEFINITION

Wavefront

A wavefront is an imaginary line that connects waves that are in phase.

We define a **wavefront** as the imaginary line that joins waves that are in phase. These are indicated by the grey, vertical lines in Figure 1. The points that are in phase can be peaks, troughs or anything in between, it doesn't matter which points you choose as long as they are in phase.

3 HUYGENS PRINCIPLE

Christiaan Huygens described how to determine the path of waves through a medium.

DEFINITION

The Huygens Principle

Every point of a wave front serves as a point source of spherical, secondary waves. After a time t , the new position of the wave front will be that of a surface tangent to the secondary waves.

Huygens principle applies to any wavefront, even those that are curved as you would get from a single point source. A simple example of the Huygens Principle is to consider the single wavefront in Figure 2.


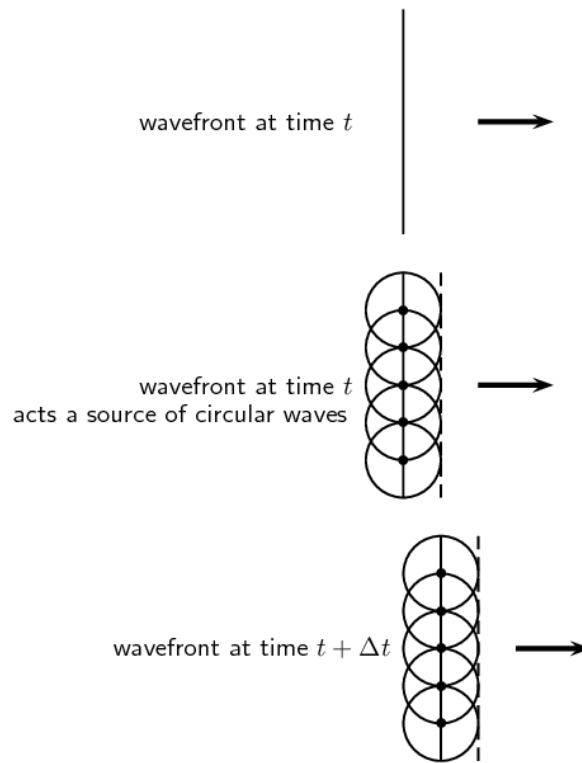


Figure 2: A single wavefront at time t acts as a series of point sources of circular waves that interfere to give a new wavefront at a time $t + \Delta t$. The process continues and applies to any shape of waveform.

WORKED EXAMPLE 1: APPLICATION OF THE HUYGENS PRINCIPLE

QUESTION

Given the wavefront,




use the Huygens Principle to determine the wavefront at a later time.


SOLUTION

WORKED EXAMPLE 1: APPLICATION OF THE HUYGENS PRINCIPLE (continued)

Step 1: Draw circles at various points along the given wavefront



Step 2: Join the circle crests to get the wavefront at a later time



4 DIFFRACTION


One of the most interesting, and also very useful, properties of waves is **diffraction**.

DEFINITION

Diffraction

Diffraction is the ability of a wave to spread out in wavefronts as the wave passes through a small aperture or around a sharp edge.

For example, if two rooms are connected by an open doorway and a sound is produced in a remote corner of one of them, a person in the other room will hear the sound as if it originated at the doorway.



As far as the second room is concerned, the vibrating air in the doorway is the source of the sound.

This means that when waves move through small holes they appear to bend around the sides because there are not enough points on the wavefront to form another straight wavefront. This is bending round the sides we call *diffraction*.

Diffraction

Diffraction effects are more clear for water waves with longer wavelengths. Diffraction can be demonstrated by placing small barriers and obstacles in a ripple tank and observing the path of the water waves as they encounter the obstacles. The waves are seen to pass around the barrier into the regions behind it; subsequently the water behind the barrier is disturbed. The amount of diffraction (the sharpness of the bending) increases with increasing wavelength and decreases with decreasing wavelength. In fact, when the wavelength of the waves are smaller than the obstacle, no noticeable diffraction occurs.

This experiment demonstrates diffraction using water waves in a ripple tank. You can also demonstrate diffraction using a single slit and a light source with coloured filters.

GENERAL EXPERIMENT

Diffraction

Water waves in a ripple tank can be used to demonstrate diffraction and interference.


- Turn on the wave generator so that it produces waves with a high frequency (short wavelength).
 - Place a few obstacles, one at a time, (e.g. a brick or a ruler) in the ripple tank. What happens to the wavefronts as they propagate near/past the obstacles? Draw your observations.
 - How does the diffraction change when you change the size of the object?

GENERAL EXPERIMENT (continued)

- Now turn down the frequency of the wave generator so that it produces waves with longer wavelengths.
 - Place the same obstacles in the ripple tank (one at a time). What happens to the wavefronts as they propagate near/past the obstacles? Draw your observations.
 - How does the diffraction change from the higher frequency case?
- Remove all obstacles from the ripple tank and insert a second wave generator. Turn on both generators so that they start at the same time and have the same frequency.
 - What do you notice when the two sets of wavefronts meet each other?
 - Can you identify regions of constructive and destructive interference?
- Now turn on the generators so that they are out of phase (i.e. start them so that they do not make waves at exactly the same time).
 - What do you notice when the two sets of wavefronts meet each other?
 - Can you identify regions of constructive and destructive interference?


5 DIFFRACTION THROUGH A SINGLE SLIT

Waves diffract when they encounter obstacles. Why does this happen? If we apply Huygens principle it becomes clear. Think about a wavefront impinging on a barrier with a slit in it, only the points on the wavefront that move into the slit can continue emitting forward moving waves - but because a lot of the wavefront has been blocked by the barrier, the points on the edges of the hole emit waves that bend round the edges. How to use this approach to understand what happens is sketched below:



Before the the wavefront strikes the barrier the wavefront generates another forward moving wavefront (applying Huygens' principle). Once the barrier blocks most of the wavefront you can see that the forward moving wavefront bends around the slit because the secondary waves they would need to interfere with to create a straight wavefront have been blocked by the barrier.

If you employ Huygens' principle you can see the effect is that the wavefronts are no longer straight lines.

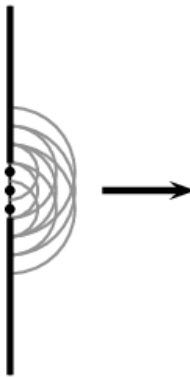


5.1 Diffraction patterns

We can learn even more about what happens after the wavefront strikes the barrier by applying Huygens' principle further.

Each point on the wavefront moving through the slit acts like a point source. We can think about some of the effects of this if we analyse what happens when two point sources are close together and emit wavefronts with the same wavelength and frequency. These two point sources represent the point sources on the two edges of the slit and we can call the source A and source B.

Each point source emits wavefronts from the edge of the slit. In the diagram we show a series of wavefronts emitted from each point source. The black lines show peaks in the waves emitted by the point sources and the gray lines represent troughs. We label the places where constructive interference (peak meets a peak or trough meets a trough) takes place with a solid diamond and places where destructive interference (trough meets a peak) takes place with a hollow diamond. When the wavefronts hit a barrier there will be places on the barrier where constructive interference takes place and places where destructive interference happens.

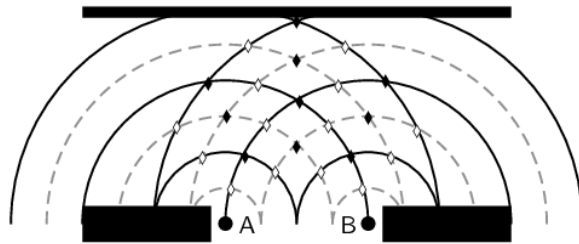


The measurable effect of the constructive or destructive interference at a barrier depends on what type of waves we are dealing with. If we were dealing with sound waves, then it would be very noisy at points along the barrier where the constructive interference is taking place and quiet where the destructive interference is taking place.


NOTE

The pattern of constructive then destructive interference measured some distance away from a single slit is caused because of two properties of waves, diffraction **and** interference. Sometimes this pattern is called an interference pattern and sometimes it is called a diffraction pattern. Both names are correct and both properties are required for the pattern to be observed. For consistency we will call it a diffraction pattern in for the rest of this book.


The intensity of the diffraction pattern for a single narrow slit looks like this:

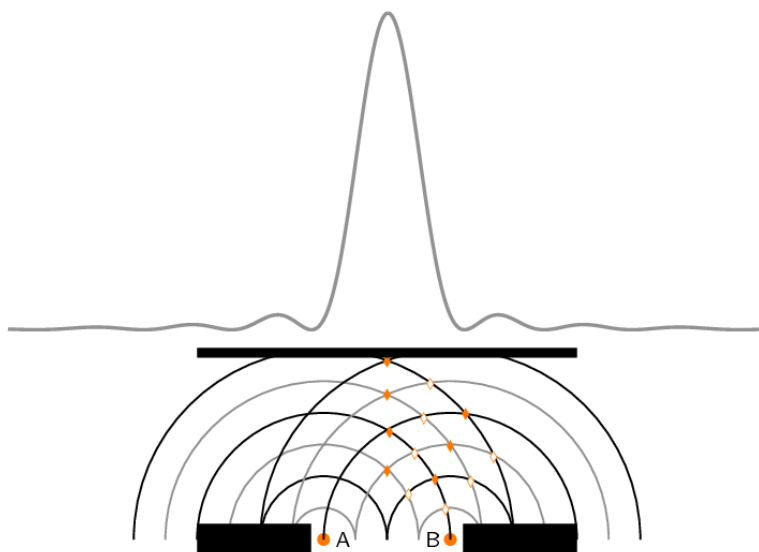


The picture above sketches how the wavefronts interfere to form the diffraction pattern. The peaks correspond to places where the waves are adding constructively and the minima are places where destructive interference is taking place. If you look at the picture you can see that if the wavelength (the distance between two consecutive peaks/troughs) of the waves were different the pattern would be different. For example, if the wavelength were halved the sketch would be:

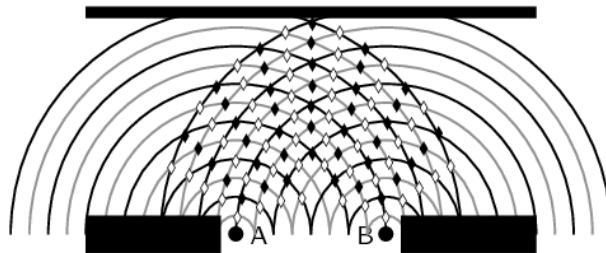


The amount that the waves diffract depends on the wavelength. We can compare the spread in the points of constructive and destructive interference by plotting the highlighted points together for the two cases. We have to line up the central maximum from the two cases to see the difference. The case where the wavelength is smaller results in smaller angles between the lines of constructive and destructive interference.

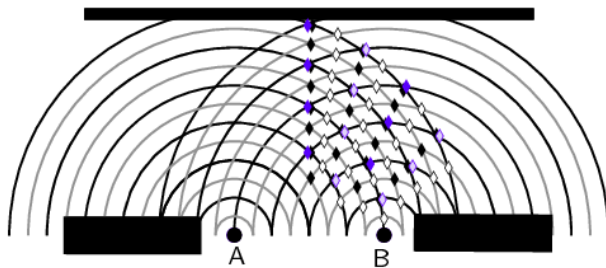

It also depends on the width of the slit, changing the width of the slit would change the distance between the points labelled A and B in the sketch. For example, if we repeat the sketch halving the distance between the points A and B we would get:

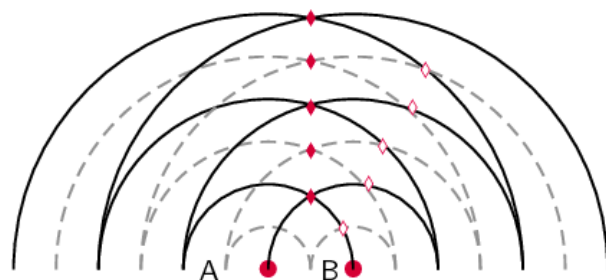

We can compare the spread in the points of constructive and destructive interference by plotting the highlighted points together for the two cases. We have to line up the central maximum from the two cases to see the difference. The case where the two points are closer together, in purple, results in bigger angles between the lines of constructive and destructive interference.

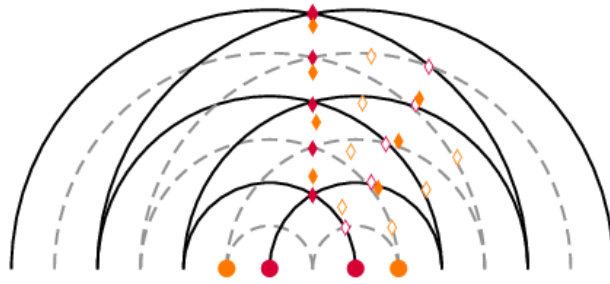

5.2 Effect of slit width and wavelength on diffraction patterns

Using our sketches we see that the extent to which the diffracted wave passing through the slit spreads out depends on the width of the slit and the wavelength of the waves. The narrower the slit, the more diffraction there is and the shorter the wavelength the less diffraction there is. The degree to which diffraction occurs is:

$$\text{diffraction} \propto \frac{\lambda}{w}$$

where λ is the wavelength of the wave and w is the width of the slit.

We can do a sanity check on the relationship by considering some special cases, very big and very small values for each of the numerator and denominator to see what sort of behaviour we expect (this is not a calculation, just a check to see what sort of outcomes we expect when we change wavelength or slit width):

- Set $\lambda = 1$ and w very large, the result will be $\frac{1}{\text{very big number}}$ which is a very small number. So for a very big slit there is very little diffraction.
- Set $\lambda = 1$ and w very small, the result will be $\frac{1}{\text{very small number}}$ which is a very big number. So for a very small slit there is large diffraction (this makes sense because eventually you are dealing with a point source which emits circular wavefronts).
- Set $\lambda = 1$ very large and $w = 1$, the result will be $\frac{\text{very big number}}{1}$ which is a very big number. So for a very big wavelength there is large diffraction.
- Set λ very small and $w = 1$, the result will be $\frac{\text{very small number}}{1}$ which is a very small number. So for a very small wavelength there is little diffraction.

5.3 Wave nature of light

In Grade 10 we learnt about electromagnetic radiation and that visible light is a small part of the EM spectrum. EM radiation is a wave so we should see diffraction for visible light when it strikes a barrier or passes through a slit. In everyday life you don't notice diffraction of light around objects or when light passes through an open door or window. This is because the wavelength of light is very small and the "slits" like doors and windows are quite large.

We can put some everyday numbers into

$$\text{diffraction} \propto \frac{\lambda}{w}$$

to see how much diffraction we expect. White light is combination of light of many different colours and each colour has a different frequency or wavelength. To make things simpler lets just think about one colour, green light has a wavelength of 532×10^{-9} m. If a wavefront of green light struck the wall of a house with an open door that is 1m wide what would we expect to see?

$$\begin{aligned} \text{diffraction} &\propto \frac{\lambda}{w} \\ &\propto \frac{532 \times 10^{-9} \text{ m}}{1 \text{ m}} \\ &\propto 532 \times 10^{-9} \end{aligned}$$



Figure 3: A diffraction grating reflecting green light.

The result is a very small number so we expect to see very little diffraction. In fact, the effect is so small that we cannot see it with the human eye. We can observe diffraction of green light but for us to get diffraction $\propto 1$ we need the wavelength and slit width to be the same number. So we know the effects of diffraction should become noticeable when the wavelength and slit width are similar. We can't change the wavelength of green light but there are objects called diffraction gratings that have very narrow slits that we can use to study the diffraction of light. We let wavefronts of green light strike a diffraction grating and then put a screen on the other side. We can see where the intensity of the the light on the screen is large and where it is small. For green light on a particular diffraction grating the pattern of green light on the screen looks like:



Blue light with a wavelength of 450×10^{-9} m and the same diffraction grating will produce:



WORKED EXAMPLE 2: DIFFRACTION

QUESTION

Two diffraction patterns are presented, determine which one has the longer wavelength based on the features of the diffraction pattern. The first pattern is for green light:



The second pattern is for red light:



The same diffraction grating is used in to generate both diffraction patterns.

SOLUTION

Step 1: Determine what is required

We need to compare the diffraction patterns to extract information about the relative wavelengths so we can decide which one is longer. We know that the diffraction pattern depends on wavelength and slit width through:

$$\text{diffraction} \propto \frac{\lambda}{w}$$

The diffraction grating is the same in both cases so we know that the slit width is fixed.

Step 2: Analyse patterns

By eye we can see that the red pattern is wider than the green pattern. There is more diffraction for the red light, this means that:

$$\text{diffraction}_{red} > \text{diffraction}_{green}$$

$$\frac{\lambda_{red}}{w} > \frac{\lambda_{green}}{w}$$

$$\lambda_{red} > \lambda_{green}$$


WORKED EXAMPLE 2: DIFFRACTION (continued)

Step 3: Final answer

The wavelength of the red light is longer than that of the green light.

5.4 Extension: Calculating maxima and minima [NOT IN CAPS]

There is a formula we can use to determine where the peaks and minima are in the interference spectrum. There will be more than one minimum. There are the same number of minima on either side of the central peak and the distances from the first one on each side are the same to the peak. The distances to the peak from the second minimum on each side is also the same, in fact the two sides are mirror images of each other. We label the first minimum that corresponds to a positive angle from the centre as $m = 1$ and the first on the other side (a negative angle from the centre) as $m = -1$, the second set of minima are labelled $m = 2$ and $m = -2$ etc.

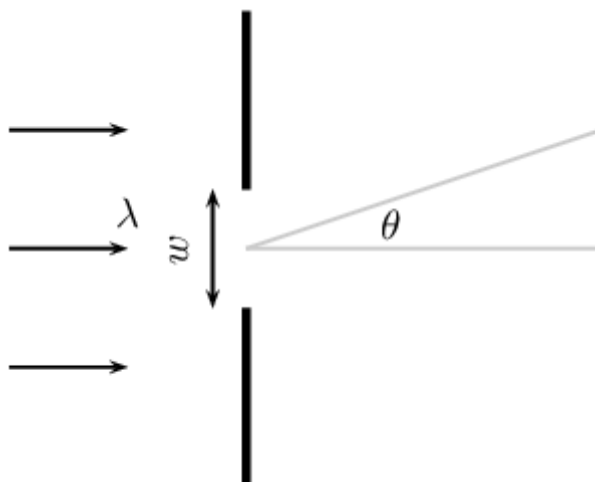

The equation for the angle at which the minima occur is given in the definition below:

DEFINITION

Interference Minima

The angle at which the minima in the interference spectrum occur is:

$$\sin \theta = \frac{m\lambda}{w}$$

where θ is the angle to the minimum

w is the width of the slit

λ is the wavelength of the impinging wavefronts

m is the order of the minimum, $m = \pm 1, \pm 2, \pm 3, \dots$

WORKED EXAMPLE 3: DIFFRACTION MINIMUM

QUESTION

A slit with a width of 2 511 nm has red light of wavelength 650 nm impinge on it. The diffracted light interferes on a surface. At which angle will the first minimum be?

SOLUTION

Step 1: Check what you are given

We know that we are dealing with diffraction patterns from the diffraction of light passing through a slit. The slit has a width of 2 511 nm which is $2\,511 \times 10^{-9}$ m and we know that the wavelength of the light is 650 nm which is 650×10^{-9} m. We are looking to determine the angle to first minimum so we know that $m = 1$.

Step 2: Applicable principles

We know that there is a relationship between the slit width, wavelength and interference minimum angles:

$$\sin \theta = \frac{m\lambda}{w}$$

We can use this relationship to find the angle to the minimum by substituting what we know and solving for the angle.

Step 3: Substitution

$$\sin \theta = \frac{650 \times 10^{-9} \text{ m}}{2511 \times 10^{-9} \text{ m}}$$

$$\sin \theta = \frac{650}{2511}$$

$$\sin \theta = 0,258861012$$

$$\theta = \sin^{-1} 0,258861012$$

$$\theta = 15^\circ$$

WORKED EXAMPLE 3: DIFFRACTION MINIMUM (continued)

The first minimum is at 15° from the centre maximum.

WORKED EXAMPLE 4: DIFFRACTION MINIMUM

QUESTION

A slit with a width of 2 511 nm has green light of wavelength 532 nm impinge on it. The diffracted light interferes on a surface, at what angle will the first minimum be?

SOLUTION

Step 1: Check what you are given

We know that we are dealing with diffraction patterns from the diffraction of light passing through a slit. The slit has a width of 2 511 nm which is $2\,511 \times 10^{-9}$ m and we know that the wavelength of the light is 532 nm which is 532×10^{-9} m. We are looking to determine the angle to first minimum so we know that $m = 1$.

Step 2: Applicable principles

We know that there is a relationship between the slit width, wavelength and interference minimum angles:

$$\sin \theta = \frac{m\lambda}{w}$$

We can use this relationship to find the angle to the minimum by substituting what we know and solving for the angle.

Step 3: Substitution

$$\sin \theta = \frac{532 \times 10^{-9} \text{ m}}{2511 \times 10^{-9} \text{ m}}$$

$$\sin \theta = \frac{532}{2511}$$

$$\sin \theta = 0,211867782$$

$$\theta = \sin^{-1} 0,211867782$$

$$\theta = 12,2^\circ$$

The first minimum is at $12,2^\circ$ from the centre peak.

From the formula $\sin \theta = \frac{m\lambda}{w}$ you can see that a smaller wavelength for the same slit results in a smaller angle

to the interference minimum. This is something you just saw in the two worked examples. Do a sanity check, go back and see if the answer makes sense. Ask yourself which light had the longer wavelength, which light had the larger angle and what do you expect for longer wavelengths from the formula.

WORKED EXAMPLE 5: DIFFRACTION MINIMUM

QUESTION

A slit has a width which is unknown and has green light of wavelength 532 nm impinge on it. The diffracted light interferes on a surface, and the first minimum is measure at an angle of $20,77^\circ$?

SOLUTION

Step 1: Check what you are given

We know that we are dealing with diffraction patterns from the diffraction of light passing through a slit. We know that the wavelength of the light is 532 nm which is 532×10^{-9} m. We know the angle to first minimum so we know that $m = 1$ and $\theta = 20,77^\circ$.

Step 2: Applicable principles

We know that there is a relationship between the slit width, wavelength and interference minimum angles:

$$\sin \theta = \frac{m\lambda}{w}$$

We can use this relationship to find the width by substituting what we know and solving for the width.

Step 3: Substitution

$$\begin{aligned}\sin \theta &= \frac{532 \times 10^{-9} \text{ m}}{w} \\ \sin 20,77^\circ &= \frac{532 \times 10^{-9}}{w} \\ w &= \frac{532 \times 10^{-9}}{0,3546666667} \\ w &= 1500 \times 10^{-9} \\ w &= 1500 \text{ nm}\end{aligned}$$

The slit width is 1500 nm.

6 CHAPTER SUMMARY

- A wavefront is an imaginary line that connects waves that are in phase.
- Huygen's Principle states that every point of a wave front serves as a point source of spherical, secondary waves. After a time t , the new position of the wave front will be that of a surface tangent to the secondary waves.
- Diffraction is the ability of a wave to spread out in wavefronts as the wave passes through a small aperture or around a sharp edge.
- When a wave passes through a slit, diffraction of the wave occurs. Diffraction of the wave is when the wavefront spreads out or "bends" around corners.
- The degree of diffraction depends on the width of the slit and the wavelength of the wave with: diffraction $\propto \frac{\lambda}{w}$ where λ is the wavelength of the wave and w is the width of the slit.

7 EXERCISES

7.1 Exercise 1

1. As the width of the slit producing a single-slit diffraction pattern is reduced, how will the diffraction pattern produced change?
2. A water break at the entrance to a harbour consists of a rock barrier with a 50 m wide opening. Ocean waves of 20 m wavelength approach the opening straight on. Light with a wavelength of 500×10^{-9} m strikes a single slit of width 30×10^{-9} . Which waves are diffracted to a greater extent?



3. For the diffraction pattern above, sketch what you expect to change if:
 - 3.1 The wavelength gets larger.
 - 3.2 The wavelength gets smaller.
 - 3.3 The slit width gets larger.
 - 3.4 The slit width gets smaller.
 - 3.5 The frequency of the wave gets smaller.
 - 3.6 The frequency of the wave gets larger.

8 ANSWERS TO EXERCISES

8.1 Exercise 1

1. More diffraction is observed as the slit width is reduced.
2. The light waves are diffracted more.
- 3.1 More diffraction would occur. The resulting diffraction pattern is wider.
- 3.2 Less diffraction would occur. The resulting diffraction pattern is narrower.
- 3.3 Less diffraction would occur. The resulting diffraction pattern is narrower.
- 3.4 More diffraction would occur. The resulting diffraction pattern is wider.
- 3.5 Frequency is inversely related to wavelength. So the wavelength gets longer and more diffraction would occur. The resulting diffraction pattern is wider.
- 3.6 Frequency is inversely related to wavelength. The wavelength gets shorter and less diffraction would occur. The resulting diffraction pattern is narrower.